





V501, EDITION 3

Prepared by the U.S. Army Topographic Command (AJBM), Washington, D.C. Compiled in 1954 by photogrammetric methods. Aerial photographs taken 1952, field annotated 1953. Revised in 1974 by the U.S. Geological Survey from aerial photographs taken 1972.

Area covered by dashed light-blue pattern is subject to controlled inundation.

100,000-foot grid based on Indiana coordinate system, east zone, Ohio coordinate system, south zone, and Kentucky coordinate system, north zone.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

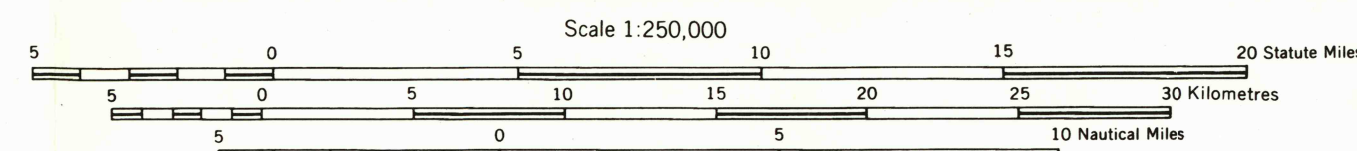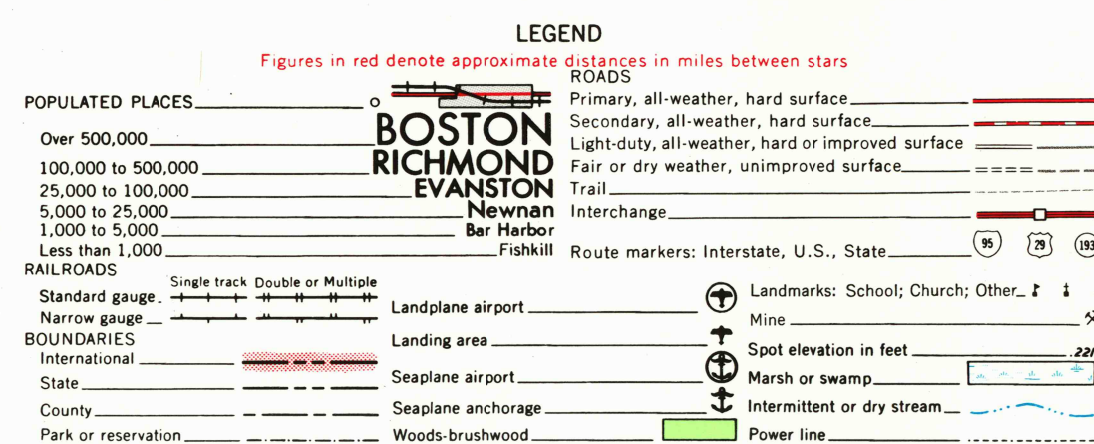

CONTOUR INTERVAL 100 FEET


TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 0° (100 MILES) FOR THE CENTER OF THE WEST EDGE TO 16° (100 MILES) WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092

LOCATION DIAGRAM

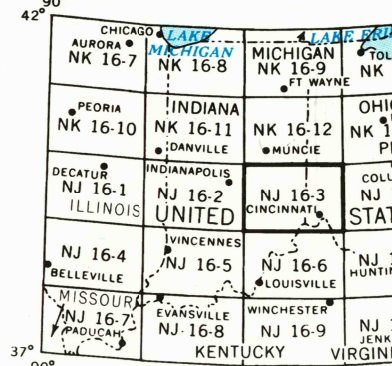

SECTIONIZED TOWNSHIP



GRID ZONE DESIGNATION

16S

100,000 M. SQUARE IDENTIFICATION

EV FV GV

EU FU GU

GU

GU

GU

GU

GU

GU

GU

GU

GU