



Prepared under the direction of the Chief of Engineers by the Army Map Service (AMS), Corps of Engineers, Department of the Army, Washington, D. C. Compiled in 1946 from United States Quadrangles, 1:62,500. Corps of Engineers and U. S. Geological Survey, 1930-44. Planimetric detail revised by photogrammetric methods. Aerial photography 1938-40. Road data verified by state authorities. Aeronautical data from Airman's Guide, Civil Aeronautics Authority. Control by U. S. Coast and Geodetic Survey.

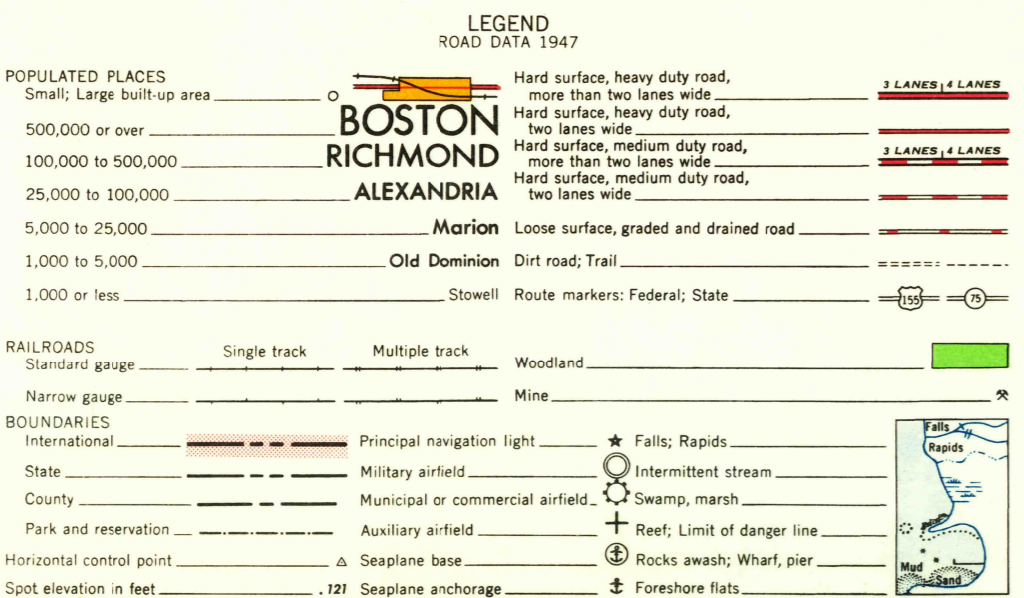

TOWNSHIP OR RANGE LINE
LAND GRANT BOUNDARY

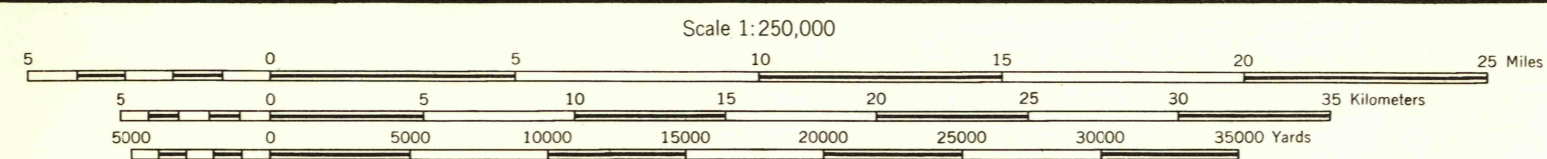

CONTOUR INTERVAL 100 FEET
100,000-FOOT GRIDS BASED ON OHIO COORDINATE SYSTEM, SOUTH ZONE
10,000-METER UNIVERSAL TRANSVERSE MERCATOR GRID TICKS, ZONE 17, SHOWN IN BLUE
TRANSVERSE MERCATOR PROJECTION


FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 0°45' WESTERLY FOR THE CENTER OF THE WEST EDGE TO 2°45' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°00' WESTERLY.

SECTIONIZED TOWNSHIP


6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

LOCATION DIAGRAM FOR NJ 17-1

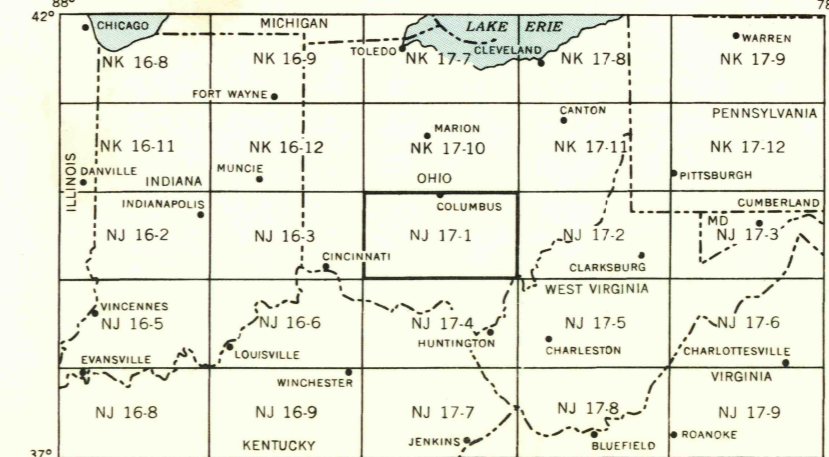

INTERIOR—GEOLOGICAL SURVEY, WASHINGTON, D. C.—1962
NK 108-5

COVERAGE DIAGRAM

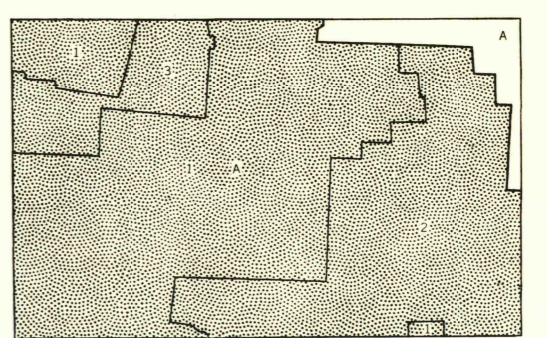

USGS
Historical File
Topographic Division
COLUMBUS, OHIO

FEB 8 1952