



Mapped, edited, and published by the Geological Survey
Control by USGS and USC&GS
Topography by photogrammetric methods from aerial
photographs taken 1962. Field checked 1965
Polyconic projection. 1927 North American datum
10,000-foot grid based on Oklahoma coordinate system, south zone
1000-meter Universal Transverse Mercator grid ticks,
zone 14, shown in blue
Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked
To place on the predicted North American Datum 1983
move the projection lines 5 meters south and
28 meters east as shown by dashed corner ticks
Revisions shown in purple compiled from aerial photographs taken
1978. Map edited 1980. This information not field checked

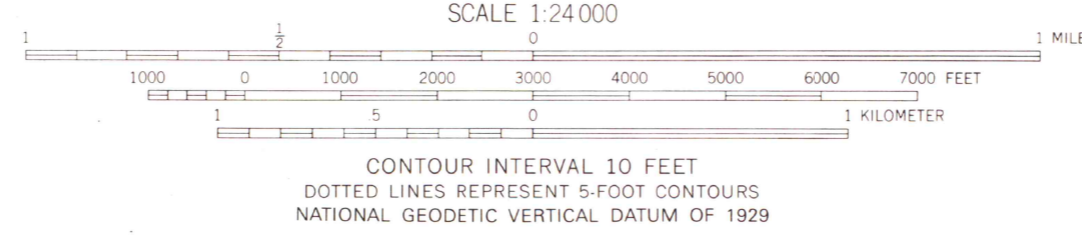

CONTOUR INTERVAL 10 FEET
DOTTED LINES REPRESENT 5-FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND BY THE OKLAHOMA GEOLOGICAL SURVEY, NORMAN, OKLAHOMA 73069
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



MAP AND AIR PHOTO
LIBRARY
OCT 31 1980
University of Wisconsin
Madison

ROAD CLASSIFICATION
Medium-duty — Light-duty
Unimproved dirt — State Route

MAYSVILLE, OKLA.
N3445-W9722.5/7.5
1965
PHOTOREVISED 1980
DMA 6553 IV SW—SERIES V883

6553 IV NW (STEALY)
6553 IV SE (STRAITFORD 30 MI.)
ANTIOCH 1.8 MI (ELMORE CITY 9 MI.)
6553 IV NE (WAYNE)
6553 IV SW (MAYSVILLE)