
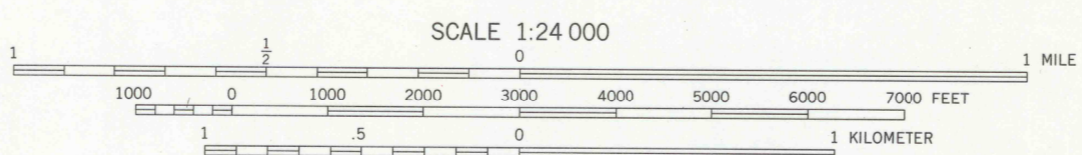


Mapped, edited, and published by the Geological Survey

Control by USGS, NOS/NOAA, and State of Oregon
Topography by photogrammetric methods from aerial photographs taken 1965. Field checked 1967


Polyconic projection. 1927 North American Datum
10,000-foot grid based on Oregon coordinate system, south zone
1000-meter Universal Transverse Mercator grid ticks, zone 10, shown in blue
The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5 minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks

Red tint indicates area in which only landmark buildings are shown
There may be private inholdings within the boundaries of the National or State reservations shown on this map



CONTOUR INTERVAL 20 FEET
SUPPLEMENTARY CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Heavy-duty Light-duty
Medium-duty Unimproved dirt
U.S. Route

SPRINGFIELD, OREG.
44122-A8-TF-024
1967
PHOTOREVISED 1986
DMA 1472 III-SERIES V892

Revisions shown in purple compiled from aerial photographs taken 1982 and other sources
This information not field checked. Map edited 1986
Purple tint indicates extension of urban areas