



Mapped, edited, and published by the Geological Survey

Control by USGS and NOS/NOAA

Topography by photogrammetric methods from aerial photographs taken 1966. Field checked 1967



Polyconic projection. 1927 North American Datum

10,000-foot grid based on Oregon coordinate system, south zone. 1000-meter Universal Transverse

Mercator grid ticks, zone 11, shown in blue

The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5 minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks

Areas covered by dashed light-blue pattern are subject to controlled inundation




CONTOUR INTERVAL 40 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

1 0 SEP 1991

ROAD CLASSIFICATION
Light duty —————
Unimproved dirt - - - - -

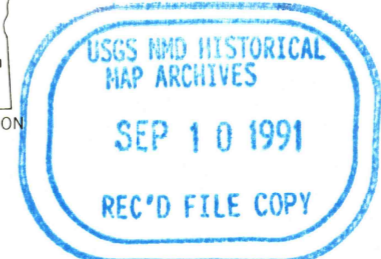

THE ELBOW, OREG.
43117-E3-TF-024

1967

DMA 2571 III SE-SERIES V892