



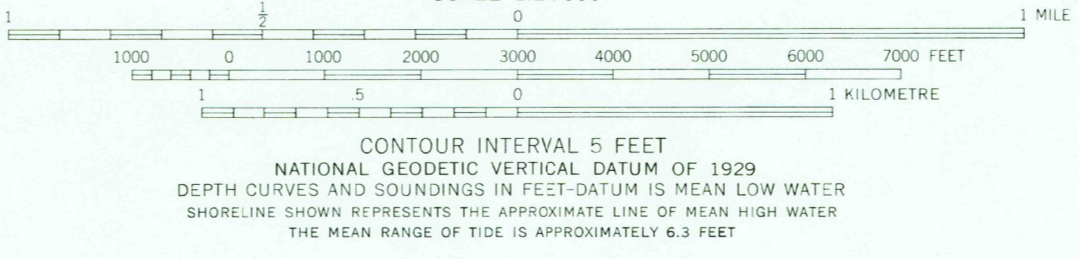

Mapped by the U. S. Coast and Geodetic Survey  
Edited and published by the Geological Survey  
Control by USC&GS and USCE  
Planimetry by photogrammetric methods from aerial photographs taken 1952, 1953, and 1959. Topography by planimeter surveys 1955. Field checked 1960.  
Selected hydrographic data compiled from USC&GS Chart 793 (1960). This information is not intended for navigational purposes.  
Polyconic projection, 1927 North American datum  
10,000-foot grid based on South Carolina coordinate system, south zone  
1000-metre Universal Transverse Mercator grid ticks, zone 17, shown in blue

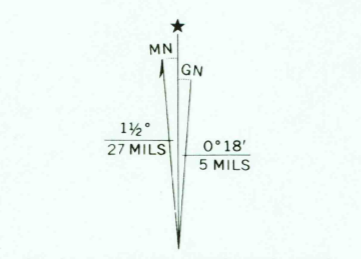

CONTOUR INTERVAL 5 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
DEPTH CURVES AND SOUNDINGS IN FEET-DATUM IS MEAN LOW WATER  
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER  
THE MEAN RANGE OF TIDE IS APPROXIMATELY 6.3 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION  
Medium-duty ————  
Light-duty - - - - -  
Unimproved dirt - - - - -

BENNETTS POINT, S. C.

32080-E4-TF-024

1960

DMA 4949 III SW—SERIES V846

To place on the predicted North American Datum 1983,  
move the projection lines 16 meters south and  
18 meters west as shown by dashed corner ticks