

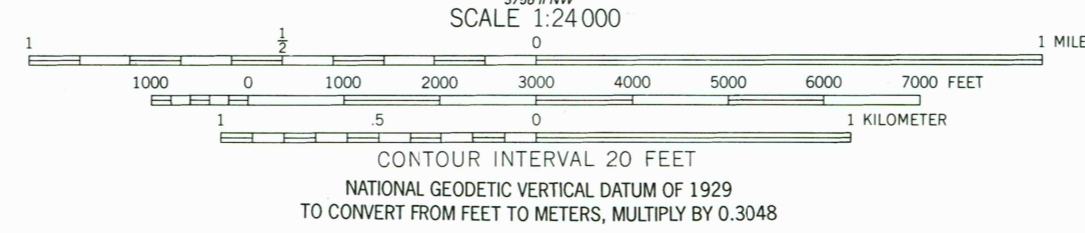



Produced by the United States Geological Survey
Derived from imagery taken 1951. Photosinspected using imagery dated 1994; no major culture or drainage changes observed. Survey control current as of 1958. Boundaries revised 1997.
North American Datum of 1927 (NAD 27). Projection and 10 000-foot ticks: Tennessee coordinate system (Lambert conformal conic).
1000-meter Universal Transverse Mercator grid, zone 16.
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.



THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND U.S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA, TENNESSEE 37402
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Primary highway, hard surface ——— Light duty road, hard or improved surface ———
Secondary highway, hard surface ——— Unimproved road ———
Interstate Route ——— U.S. Route ——— State Route ———

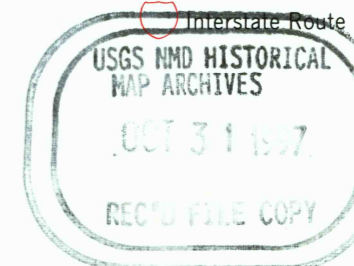

BELLWOOD, TN

1994

DMA 3756 1 SW-SERIES V841

