




Basic control by USC&GS, USGS, and TVA  
Topography by USGS and TVA from aerial  
photographs by stereophotogrammetric methods  
Field examination by Tennessee Valley Authority, 1947  
Maps distributed by the Geological Survey  
1000 meter Universal Transverse Mercator grid ticks,  
zone 16, shown in blue

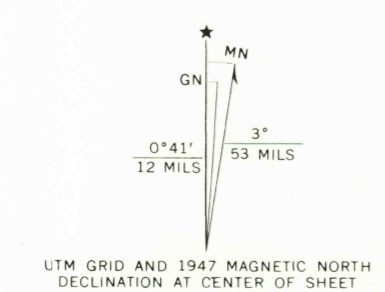

Contour interval 20 feet  
Datum is mean sea level

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092  
AND TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENNESSEE 37219  
AND BY U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA, TENN. 37401 OR KNOXVILLE, TENN. 37902  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

Polycyclic projection, 1927 North American datum  
10,000 foot grid based on Tennessee  
rectangular coordinate system  
ROUTES USUALLY TRAVELED  
HARD, IMPERVIOUS SURFACES  
OTHER SURFACE IMPROVEMENTS  
U. S. ROUTE STATE ROUTE  
AUG 5 1974 ORME, TENN.  
94-SE  
N3500-W8545/7.5  
1947  
AMS 3854 III SE—SERIES V841

Historical File  
Topographic Division

3854 III SE (Franklin 94-SE)  
3854 III SE (Marion 94-SE)  
3854 III SE (Franklin 100-SW)  
3854 III SE (Marion 100-SW)  
3854 III SE (Franklin 100-NE)  
3854 III SE (Marion 100-NE)  
3854 III SE (Franklin 100-E)  
3854 III SE (Marion 100-E)