




Mapped and edited by Tennessee Valley Authority
Published by the Geological Survey
Basic control by USC&GS, USGS, and TVA
Topography by USGS and TVA by multiplex and planetable methods. Aerial photographs taken 1946 and 1952
Field examination by TVA, 1949
Polyconic projection. 1927 North American datum
10,000-foot grid based on Tennessee rectangular coordinate system
—378— Indicates Kentucky Lake Easement Boundary

414°
TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN DECLINATION 1949

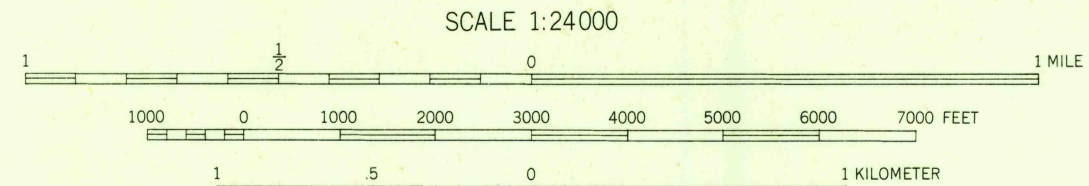

CONTOUR INTERVAL 20 FEET
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS
DATUM IS MEAN SEA LEVEL
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENNESSEE
U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
In developed areas, only through roads are classified

HARD-SURFACE ALL WEATHER ROADS	DRY WEATHER ROADS
Heavy-duty — 4 LANE LANE	Improved dirt —
Medium-duty — 4 LANE LANE	Unimproved dirt —
Loose-surface, graded, or narrow hard-surface —	
(8) U. S. Route	(20) State Route



PERRYVILLE, TENN.
N3530-W8800/7.5
1949
MINOR CORRECTIONS MADE 1952