




Mapped and edited by Tennessee Valley Authority
Published by the Geological Survey
Control by USC&GS, USGS, WPA, and TVA
Topography by USGS and TVA by multiplex methods from aerial
photographs taken 1948. Field examination by TVA, 1951
Polyconic projection. 1927 North American datum
10,000-foot grid based on Tennessee rectangular
coordinate system
1000 meter Universal Transverse Mercator Grid ticks,
Zone 16, shown in blue.

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION 1955

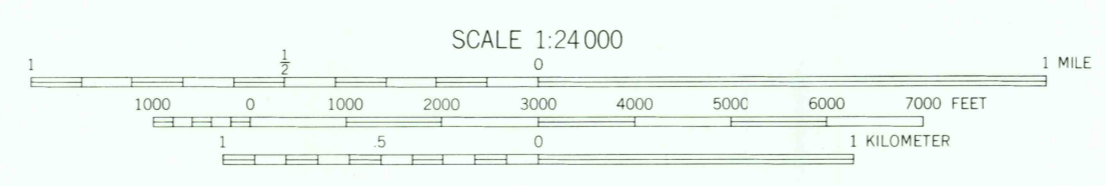

CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS

FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENN.
U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
HARD-SURFACE ALL WEATHER ROADS
Heavy-duty 4 LANE 16 LANE
Medium-duty 4 LANE 16 LANE
Loose-surface, graded, or narrow hard-surface
U. S. Route
DRY WEATHER ROADS
Improved dirt
Unimproved dirt
State Route

USGS
Historical File
Topographic Division
1951
PRIMM SPRINGS, TENN.
N3545-W8705/7.5
MAR 15 1977