

Mapped, edited, and published by the Geological Survey

Control by USGS and NOS/NOAA

Topography by photogrammetric methods from aerial photographs taken 1976. Field checked 1979. Map edited 1985



Projection and 10,000-foot grid ticks: Utah coordinate system, south zone (Lambert conformal conic) 1000-meter Universal Transverse Mercator grid, zone 12 1927 North American Datum

To place on the predicted North American Datum 1983 move the projection lines 5 meters north and 64 meters east as shown by dashed corner ticks

Areas covered by dashed light-blue pattern are subject to controlled inundation

Where omitted, land lines have not been established



There may be private inholdings within the boundaries of the National or State reservations shown on this map

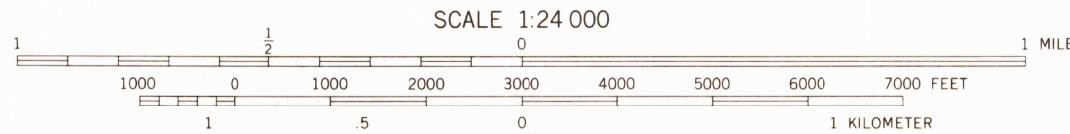

CONTOUR INTERVAL 40 FEET
CONTOUR INTERVAL 80 FEET IN LAKE POWELL
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION	
Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road
Interstate Route	U.S. Route
	State Route



CATHEDRAL CANYON, UTAH-ARIZ.
SE/4 CUMMINGS MESA 15' QUADRANGLE
37111-A1-TF-024
1985
DMA 3758 II SE-SERIES V897

