



USGS Library Reston, VA. Topo Archive

SEP 19 2006

Mapped, edited, and published by the Geological Survey

Control by USGS and NOS/NOAA

Topography by photogrammetric methods from aerial photographs taken 1950. Field checked 1952. Revision and orthophotomosaic from aerial photographs taken 1971. Field checked 1972



Underwater contours by photogrammetric methods from aerial photographs taken 1966, 1969 and 1971-72

Soundings compiled from chart furnished by U.S. Naval Reserve

Projection and 10,000-foot grid ticks: Utah coordinate system, central zone (Lambert conformal conic)

1000-meter Universal Transverse Mercator grid ticks, zone 12, shown in blue

The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5 minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks

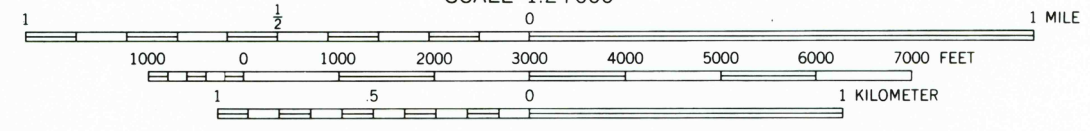

CONTOUR INTERVAL 40 FEET  
DOTTED LINES REPRESENT 10-FOOT CONTOURS  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
SOUNDINGS IN FEET-DATUM IS LAKE ELEVATION 4200 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U.S. GEOLOGICAL SURVEY  
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION table with symbols for Primary highway, Secondary highway, Interstate Route, U. S. Route, and State Route.



FARNSWORTH PEAK, UTAH  
40112F2-OM-024

1972

DMA 3565 II NW-SERIES V897

