

Mapped, edited, and published by the Geological Survey



Control by USGS and NOS/NOAA  
Topography by photogrammetric methods from aerial photographs  
taken 1966. Field checked 1968

Polyconic projection. 1927 North American Datum  
10,000-foot grid based on Utah coordinate system,  
south zone  
1000-meter Universal Transverse Mercator grid ticks, zone 12,  
shown in blue  
The difference between 1927 North American Datum and North  
American Datum of 1983 (NAD 83) for 7.5 minute intersections is  
given in USGS Bulletin 1875. The NAD 83 is shown by dashed  
corner ticks

Where omitted, land lines have not been established

Map photosinspected 1976


No major culture or drainage changes observed



CONTOUR INTERVAL 20 FEET  
DOTTED LINES REPRESENT 20-FOOT CONTOURS  
NATIONAL GEODETIC DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U.S. GEOLOGICAL SURVEY  
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

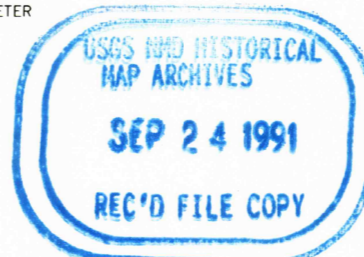

QUADRANGLE LOCATION

ROAD CLASSIFICATION  
Unimproved road, fair or dry weather

FOURMILE BENCH, UTAH  
37111-C6-TF-024

1968  
PHOTOINSPECTED 1976  
DMA 3658 I SW-SERIES V897