



Mapped, edited, and published by the Geological Survey

Control by USGS and NOS/NOAA

Topography by photogrammetric methods from aerial photographs taken 1968. Field checked 1969.

Polyconic projection. 1927 North American Datum

10,000-foot grid based on Utah coordinate system,

north zone



1000-meter Universal Transverse Mercator grid ticks, zone 12,

shown in blue

The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5 minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks

Where omitted, land lines have not been established

Map photoinspected 1981
No major culture or drainage changes observed

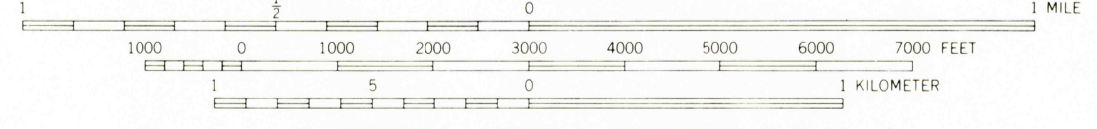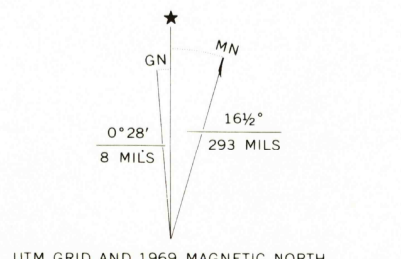

CONTOUR INTERVAL 40 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

Primary highway, hard surface

Secondary highway, hard surface


Unimproved road

Light-duty road, hard or improved surface

Interstate Route

U. S. Route

State Route



NAOMI PEAK, UTAH-IDAHO

41111-H6-TF-024

1969
PHOTOINSPECTED 1981
DMA 3667 1 NW-SERIES V897

