

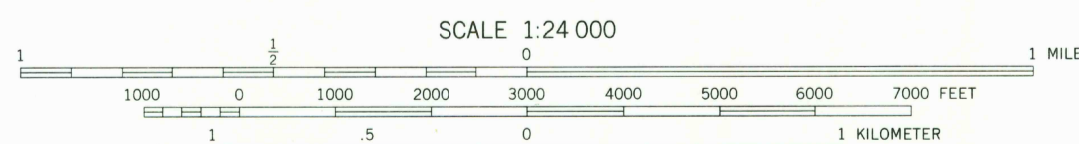


Mapped, edited, and published by the Geological Survey in cooperation with the Bureau of Reclamation Control by USGS and NOS/NOAA Topography by photogrammetric methods from aerial photographs taken 1963. Field checked 1964 Polyconic projection, 1927 North American datum 10,000-foot grid based on Utah coordinate system, central zone 1000-meter Universal Transverse Mercator grid ticks, zone 12, shown in blue Fine red dashed lines indicate selected fence lines Revisions shown in purple are compiled from aerial photographs taken 1976 and other source data. This information not field checked. Map edited 1978



CONTOUR INTERVAL 20 FEET
DOTTED LINES REPRESENT 5-FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929



ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
U. S. Route

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

VERNAL SE, UTAH
N4015-W10930/7.5
1964
PHOTOREVISED 1978
DMA 4064 I SE—SERIES V897

DEC 17 1981

5900