



Mapped by the U. S. Forest Service
Edited and published by the U. S. Geological Survey
Control by USGS, USC&GS and U. S. Forest Service
Topography by photogrammetric methods from aerial photographs taken 1964 and 1967. Field checked by USGS 1972.
Projection: Utah coordinate system, central zone (Lambert conformal conic)
10,000-foot grid ticks based on Utah coordinate system, central and north zones
1000-meter Universal Transverse Mercator grid ticks, zone 12, shown in blue. 1927 North American Datum
Fine red dashed lines indicate selected fence lines
To place on the predicted North American Datum 1983 move the projection lines 9 meters north and 63 meters east as shown by dashed corner ticks

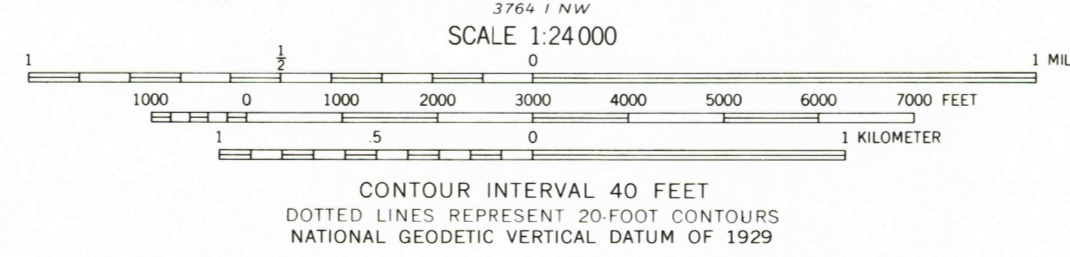

CONTOUR INTERVAL 40 FEET
DOTTED LINES REPRESENT 20 FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929

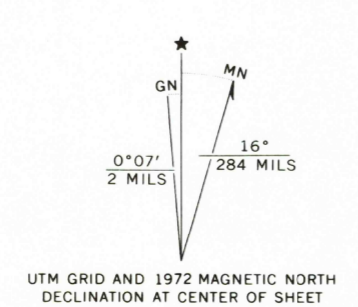


ROAD CLASSIFICATION

Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road

Legend:
○ Interstate Route
○ U. S. Route
○ State Route

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

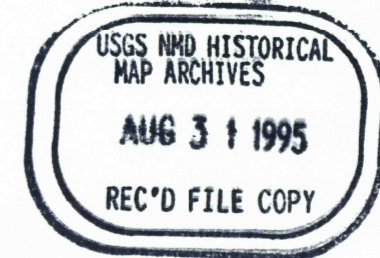

WOODLAND, UTAH
40111-E2-TF-024
1972
DMA 3765 II SW-SERIES V897

