


Prepared by the Army Map Service (KCDV), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1958 from: United States Quadrangles, 1:17,000, 1:20,000, 1:24,000, 1:25,000, 1:48,000, 1:50,000, 1:62,500, U.S. Geological Survey, AMS, 1949-56. USC&GS Charts 6002, 1942; 6151, 1956; 6152, 1955; 6153, 1957; 6154, 1957; 6185, 1956; 6195, 1957. Planimetric detail revised by photo-planimetric methods. Control by USGS, USC&GS, CE, State of Oregon, Oregon Geodetic Society, Pacific Power and Light Company, and Oregon State Highway Department. Map field checked 1958. 100,000-foot grids based on Washington coordinate system, south zone, and Gregon Coordinate system.


south zone, and Oregon coordinate system, north zone 10,000-meter Universal Transverse Mercator grid ticks, zone 10, shown in blue

Depth curve in fathoms ____ Limit of danger; Reef Landing area_____ Rocks: Awash; Sunken_ State_____

CONTOUR INTERVAL 200 FEET WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS TRANSVERSE MERCATOR PROJECTION

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 22° 00' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 21° 30' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0° 02' WESTERLY. FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER 25, COLORADO OR WASHINGTON 25, D.C.

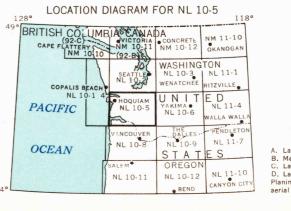

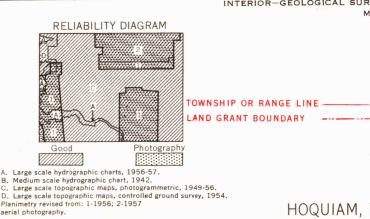

18 17 16 15 14 13 19 20 21 22 23 24 30 29 28 27 26 25 31 32 33 34 35 36

HOQUIAM, WASHINGTON; OREGON