



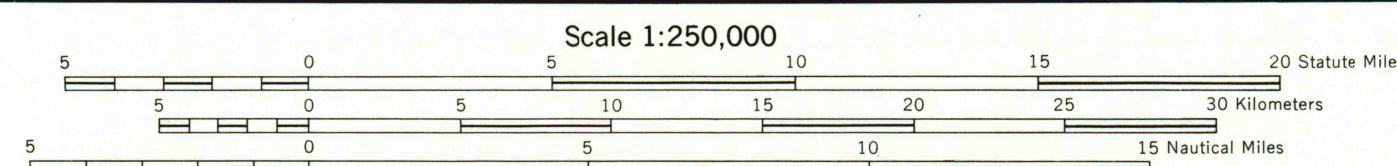


PRODUCED BY THE U.S. GEOLOGICAL SURVEY
Base map prepared by Defense Mapping Agency by photogrammetric methods and from 1:24,000 and 1:62,500-scale maps dated 1926-1953. Field checked 1958. Revised by the U.S. Geological Survey from aerial photographs taken 1981 and other source data. Revised information not field checked. Map dated 1983.
Selected hydrographic data compiled from NOS charts. This information is not intended for navigational purposes.
Transverse Mercator Projection, 10,000-meter Universal Transverse Mercator grid, zone 16. 100,000-foot grid based on Michigan coordinate system, south zone, and based on Illinois coordinate system, east zone, and on Wisconsin coordinate system, south zone. 1927 North American Datum. To place on the predicted North American Datum 1983 move the projection lines 2 meters north and 4 meters east.
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

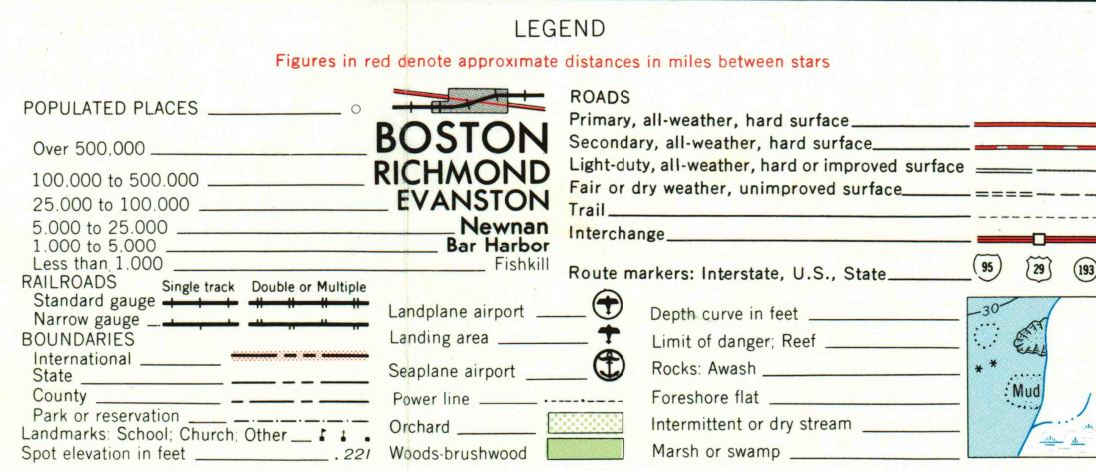

1983 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 1/4° (9 MILS) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 2 1/4° (44 MILS) WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092

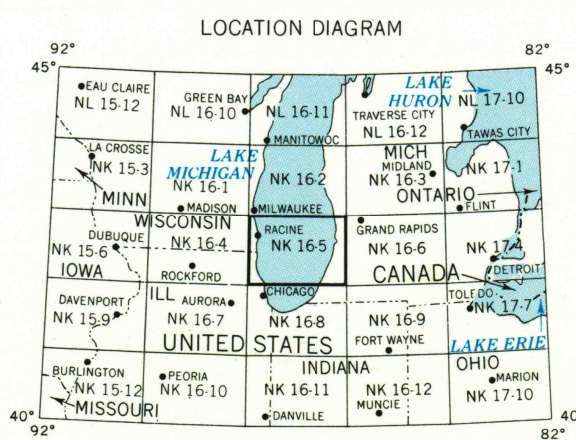

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION: 18T

100,000 M. SQUARE IDENTIFICATION

DC	EC	DB	EB
----	----	----	----

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: INDUSTRIAL SITE

1. Read letters identifying 100,000 meter square in which the point lies.

2. Square first horizontal grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point.

4. Square first vertical grid line to RIGHT of point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

5. Estimate tenths from grid line to point.

SAMPLE REFERENCE: 4660000

If reporting beyond 10" in any direction, prefix Grid Zone Designation, as: 18TDB3393

RACINE, WISCONSIN; MICHIGAN; ILLINOIS

1958
REVISED 1983
42086-A1-TF-250

7/9/84