EASTERN UNITED STATES 1:250,000

MONTGOMERY

EDITION 1–AMS

REFER TO THIS MAP AS: NI 16-11
SERIES V501

V501
Edition 1–AMS (First Printing, 11-56)

Prepared by the Army Map Service (AJEE), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1955 by photogrammetric methods. Horizontal and vertical control by USGS and USC&GS. Aerial photography 1952. Photography field annotated 1953.

LEGEND

ROAD DATA 1953
Figures in red denote approximate distances in miles between stars

POPULATED PLACES
- Over 500,000 — BOSTON
- 100,000 to 500,000 — RICHMOND
- 25,000 to 100,000 — EVANSTON
- 5,000 to 25,000 — Hialeah
- 1,000 to 5,000 — Bar Harbor
- Less than 1,000 — Fishkill

RAILROADS (Single track / Double or Multiple)
- Standard gauge
- Narrow gauge

BOUNDARIES
- International
- State
- County
- Park or reservation

ROADS
- Hard surface, heavy duty
  - More than two lanes wide (3 LANES / 4 LANES)
  - Two lanes wide; Federal route marker
- Hard surface, medium duty
  - More than two lanes wide (3 LANES / 4 LANES)
  - Two lanes wide; State route marker
- Improved light duty
- Unimproved dirt
- Trail

- Landplane airport
- Landing area
- Seaplane airport
- Seaplane anchorage
- Woods-brushwood
- Landmarks: School; Church; Other
- Horizontal control point
- Spot elevation in feet .221
- Marsh or swamp
- Intermittent or dry stream
- Power line

Scale 1:250,000

5 0 5 10 15 20 Statute Miles
5 0 5 10 15 20 25 30 Kilometers
5 0 5 10 Nautical Miles

CONTOUR INTERVAL 50 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16
THE LAST FOUR DIGITS OF THE GRID NUMBERS ARE OMITTED

1955 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 4°15′ EASTERLY FOR THE CENTER OF THE WEST EDGE TO 2°45′ EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°01′ WESTERLY.

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

U. S. GEOLOGICAL SURVEY WASHINGTON
MAR 11 1957
LIBRARY

LOCATION DIAGRAM FOR NI 16-11

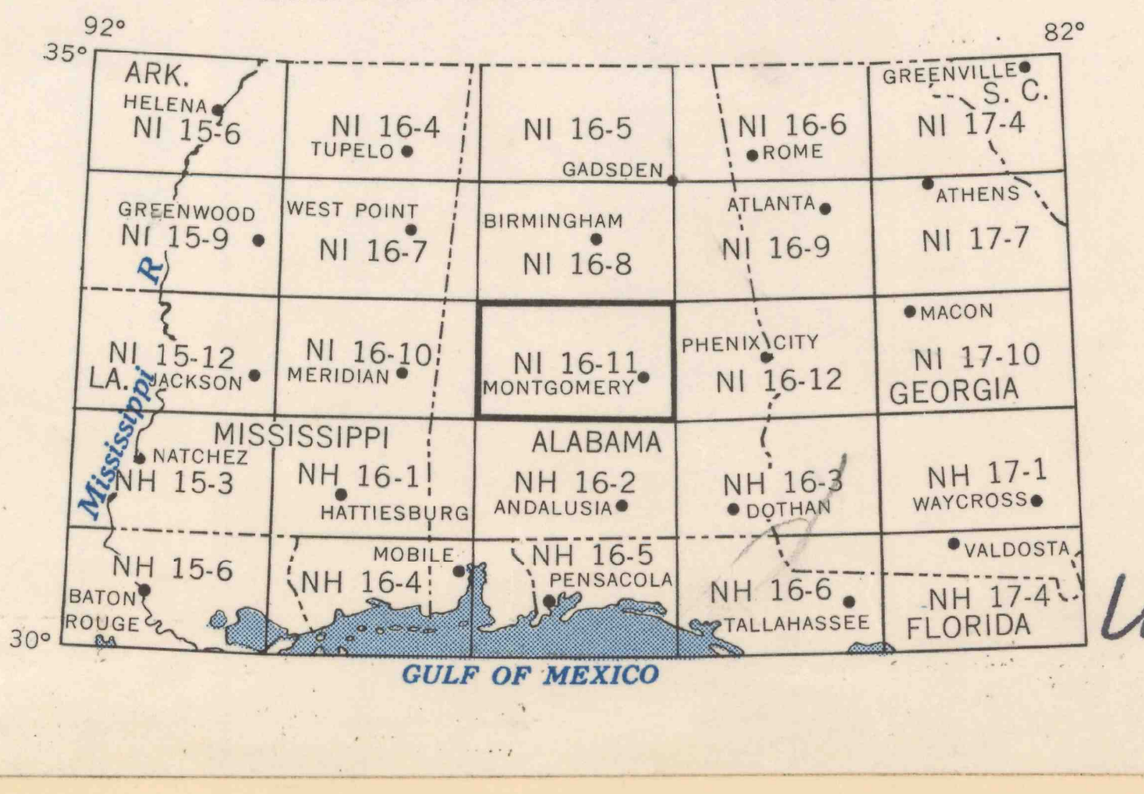

PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS, 11-56, 776234

GRID ZONE DESIGNATION: 16S	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS		
100,000 M. SQUARE IDENTIFICATION	SAMPLE POINT: GORDONSVILLE		
DM EM / DL EL (360, 50)	1. Read letters identifying 100,000 meter square in which the point lies:	EL	
	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: Estimate tenths from grid line to point:		2 5
	3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: Estimate tenths from grid line to point:		5 8
IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 3550000	SAMPLE REFERENCE:	EL2558	
	If reporting beyond 18° in any direction, prefix Grid Zone Designation, as:	16SEL2558	

United States. Topo. 1:250,000. ~~MONTGOMERY, ALABAMA~~
sheet Montgomery, cop. 1