EASTERN UNITED STATES 1:250,000

FORT WAYNE

EDITION 3

NK 16-9
SERIES V501

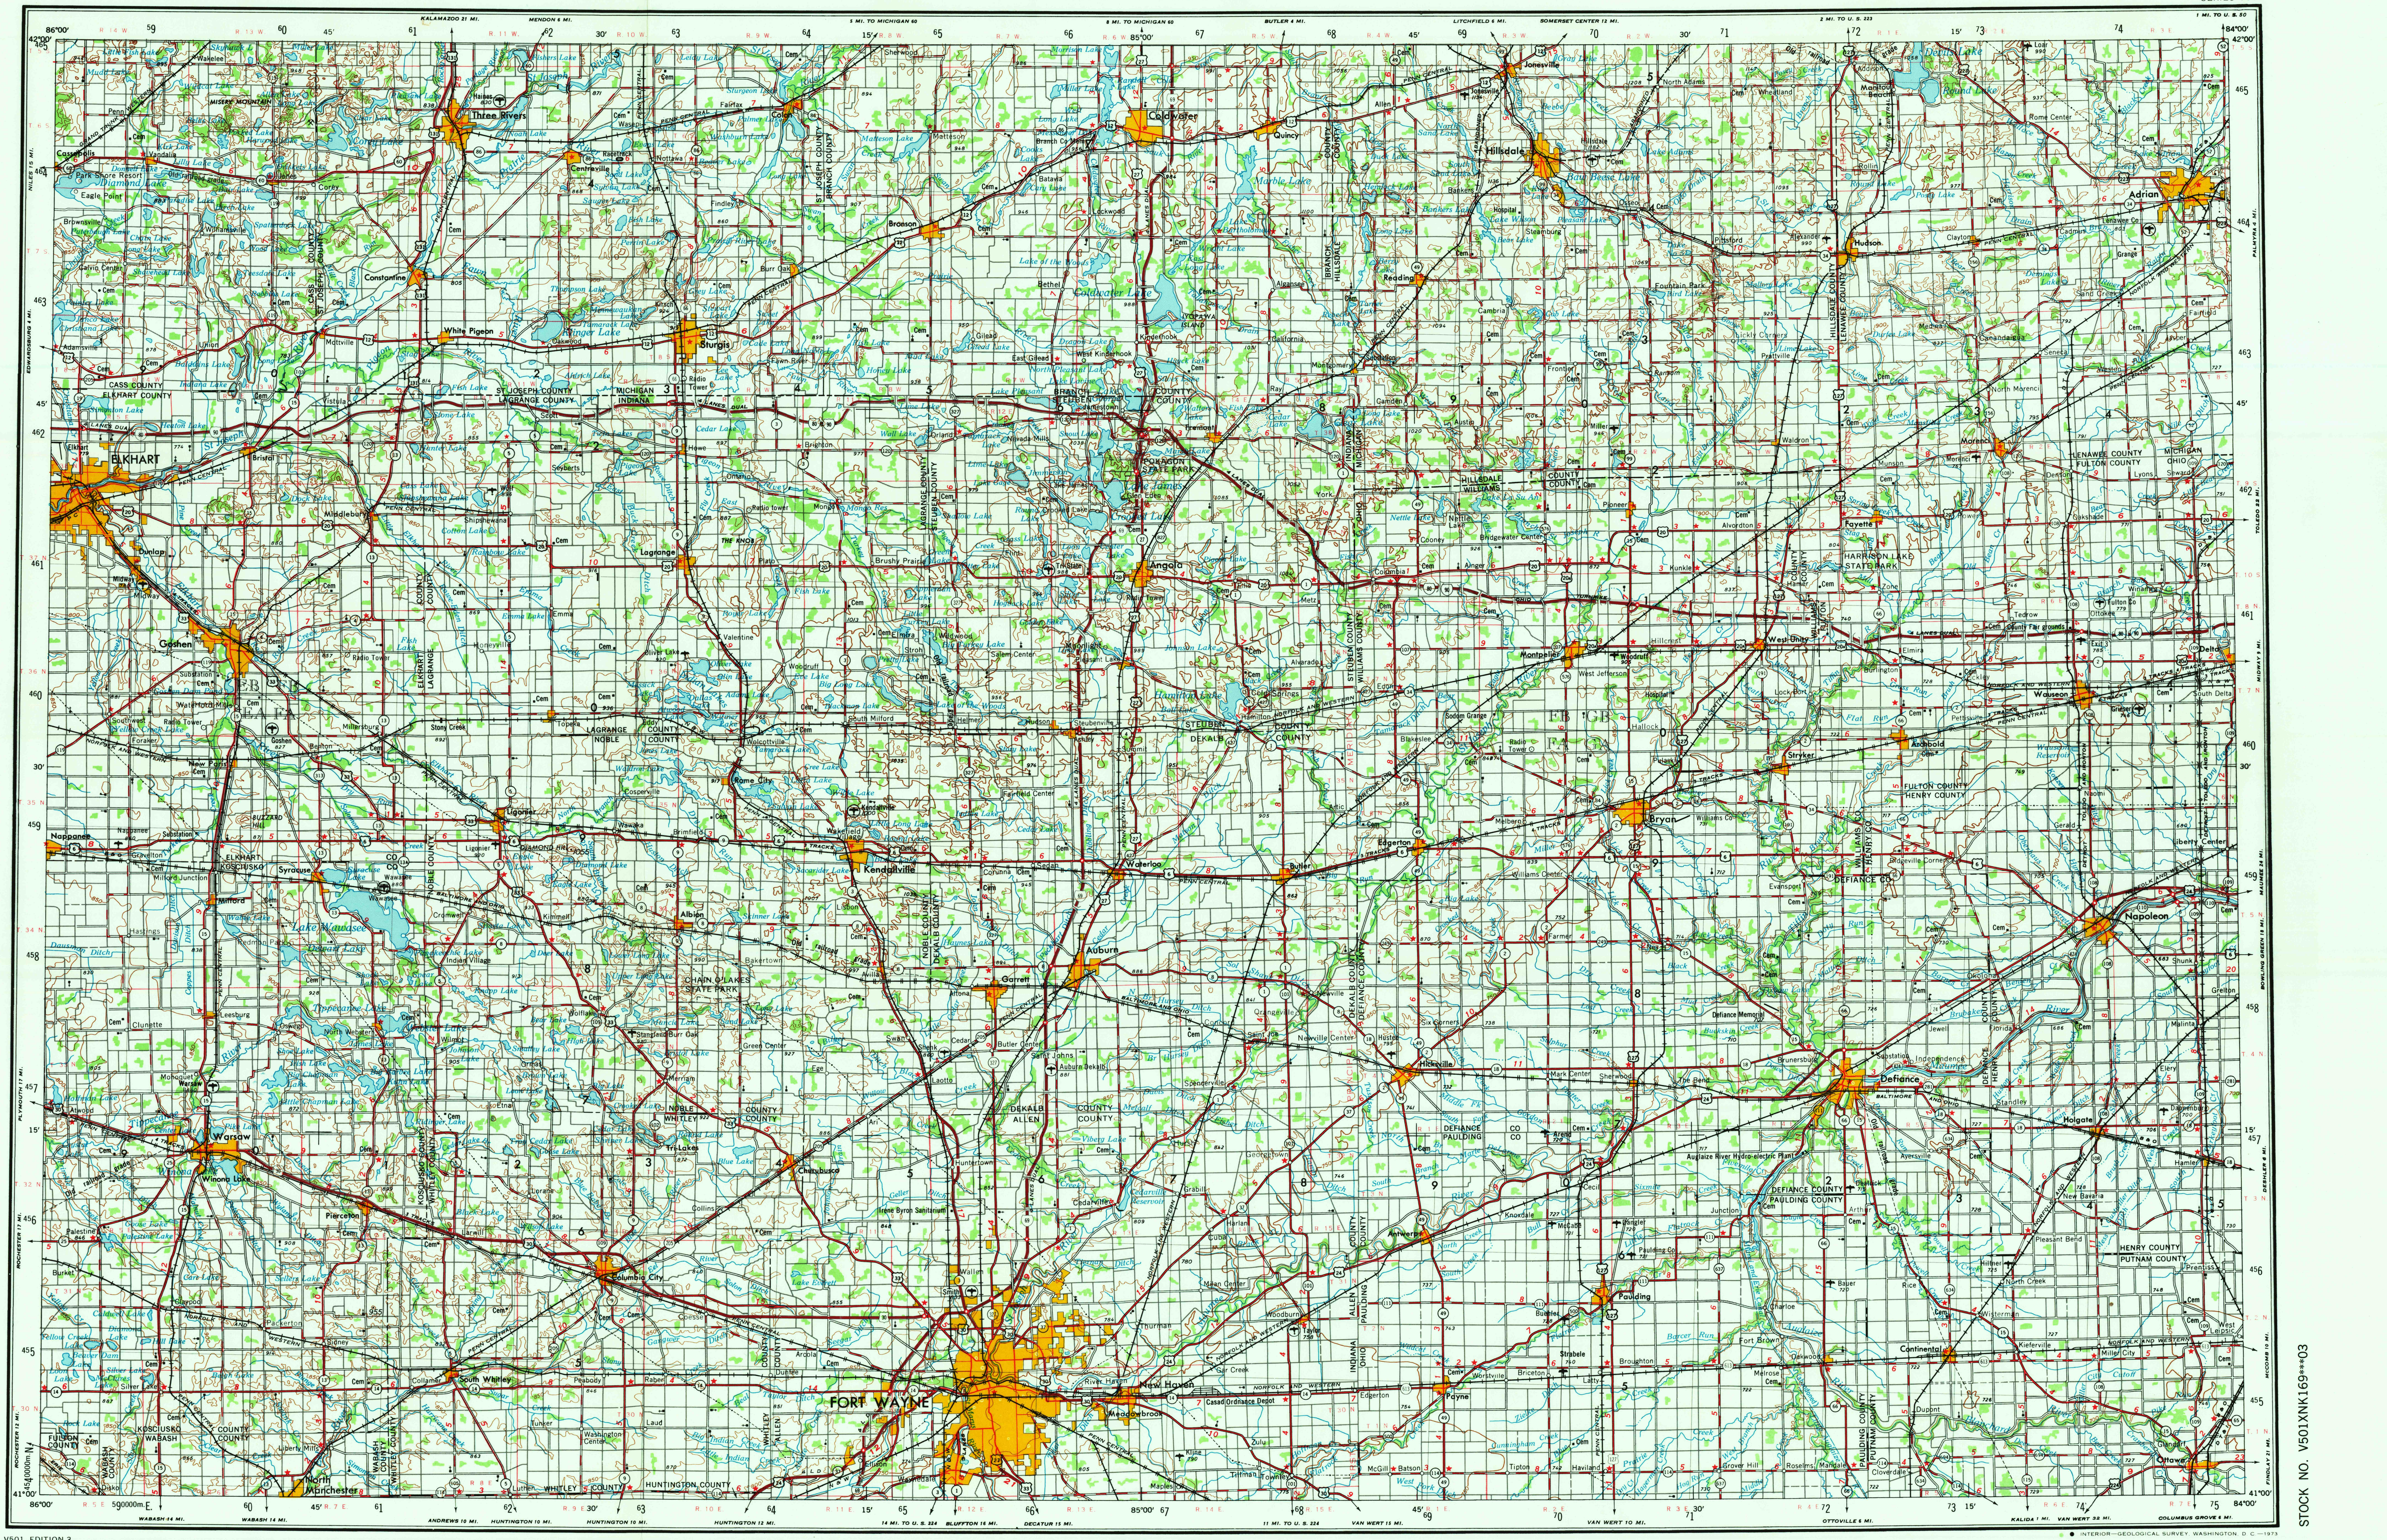

INTERIOR—GEOLOGICAL SURVEY, WASHINGTON, D. C.—1973

STOCK NO. V501XNK169**03

V501, EDITION 3

Prepared by the U.S. Army Topographic Command (AJBM), Washington, D.C. Compiled in 1954 by photogrammetric methods from aerial photographs taken 1952. Photographs field annotated 1953. Revised by the U.S. Geological Survey 1969.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500 000 — BOSTON
100,000 to 500,000 — RICHMOND
25,000 to 100,000 — EVANSTON
5,000 to 25,000 — Hialeah
1,000 to 5,000 — Bar Harbor
Less than 1,000 — Fishkill

RAILROADS — Single track / Double or Multiple
Standard gauge
Narrow gauge

BOUNDARIES
International
State
County
Park or reservation

ROADS
Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Interchange

Route markers: Interstate, U.S., State — 69 30 13

Landplane airport
Landing area
Seaplane airport
Seaplane anchorage
Woods-brushwood

Landmarks: School; Church; Other
Windmill; Mine
Spot elevation in feet — 221
Marsh or swamp
Intermittent or dry stream
Power line

Scale 1:250,000

5 0 5 10 15 20 Statute Miles
5 0 5 10 15 20 25 30 Kilometers
5 0 5 10 Nautical Miles

CONTOUR INTERVAL 50 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16

1965 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 0° (00 MILS) FOR THE CENTER OF THE WEST EDGE TO 2° (40 MILS) WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C. 20242

LOCATION DIAGRAM

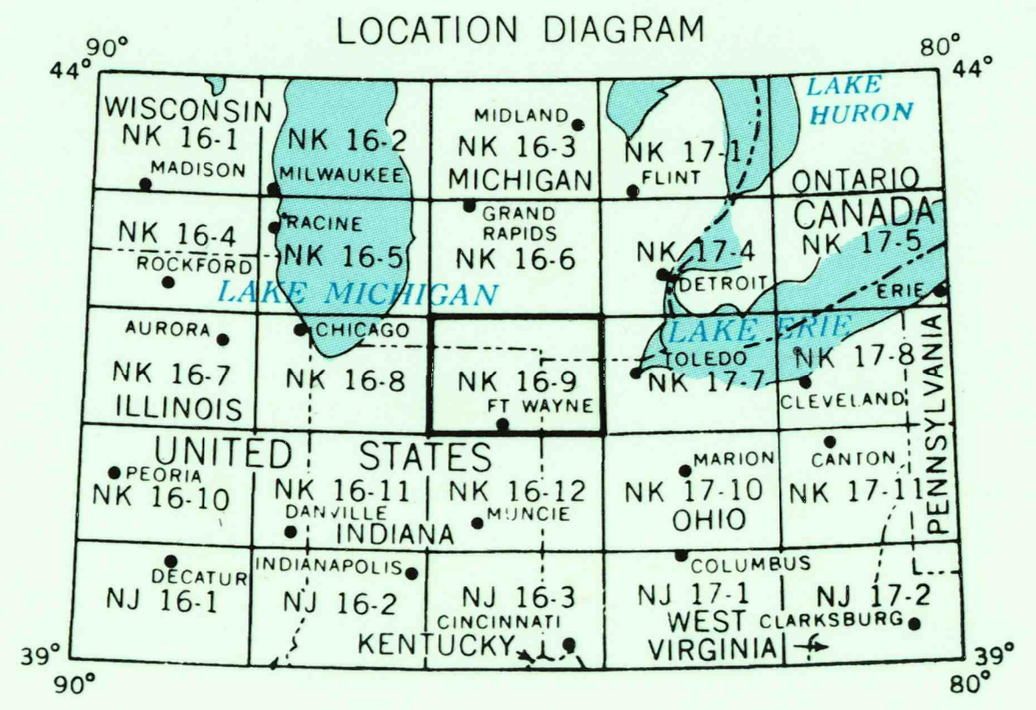

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

TOWNSHIP OR RANGE LINE
LAND GRANT BOUNDARY

GRID ZONE DESIGNATION: 16T

100,000 M. SQUARE IDENTIFICATION

EB	FB	GB
EA	FA	GA

IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figures of the grid number; example: 4540000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: BROUGHTON

1. Read letters identifying 100,000 meter square in which the point lies: GA
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: 0
Estimate tenths from grid line to point: 7
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: 5
Estimate tenths from grid line to point: 1

SAMPLE REFERENCE: GA0751

If reporting beyond 18° in any direction, prefix Grid Zone Designation, as: 16TGA0751

FORT WAYNE, INDIANA; MICHIGAN; OHIO
1953
REVISED 1969

DMA 6500

FEB 13 1973

USGS HISTORICAL FILE TOPOGRAPHIC DIVISION