QUEBEC

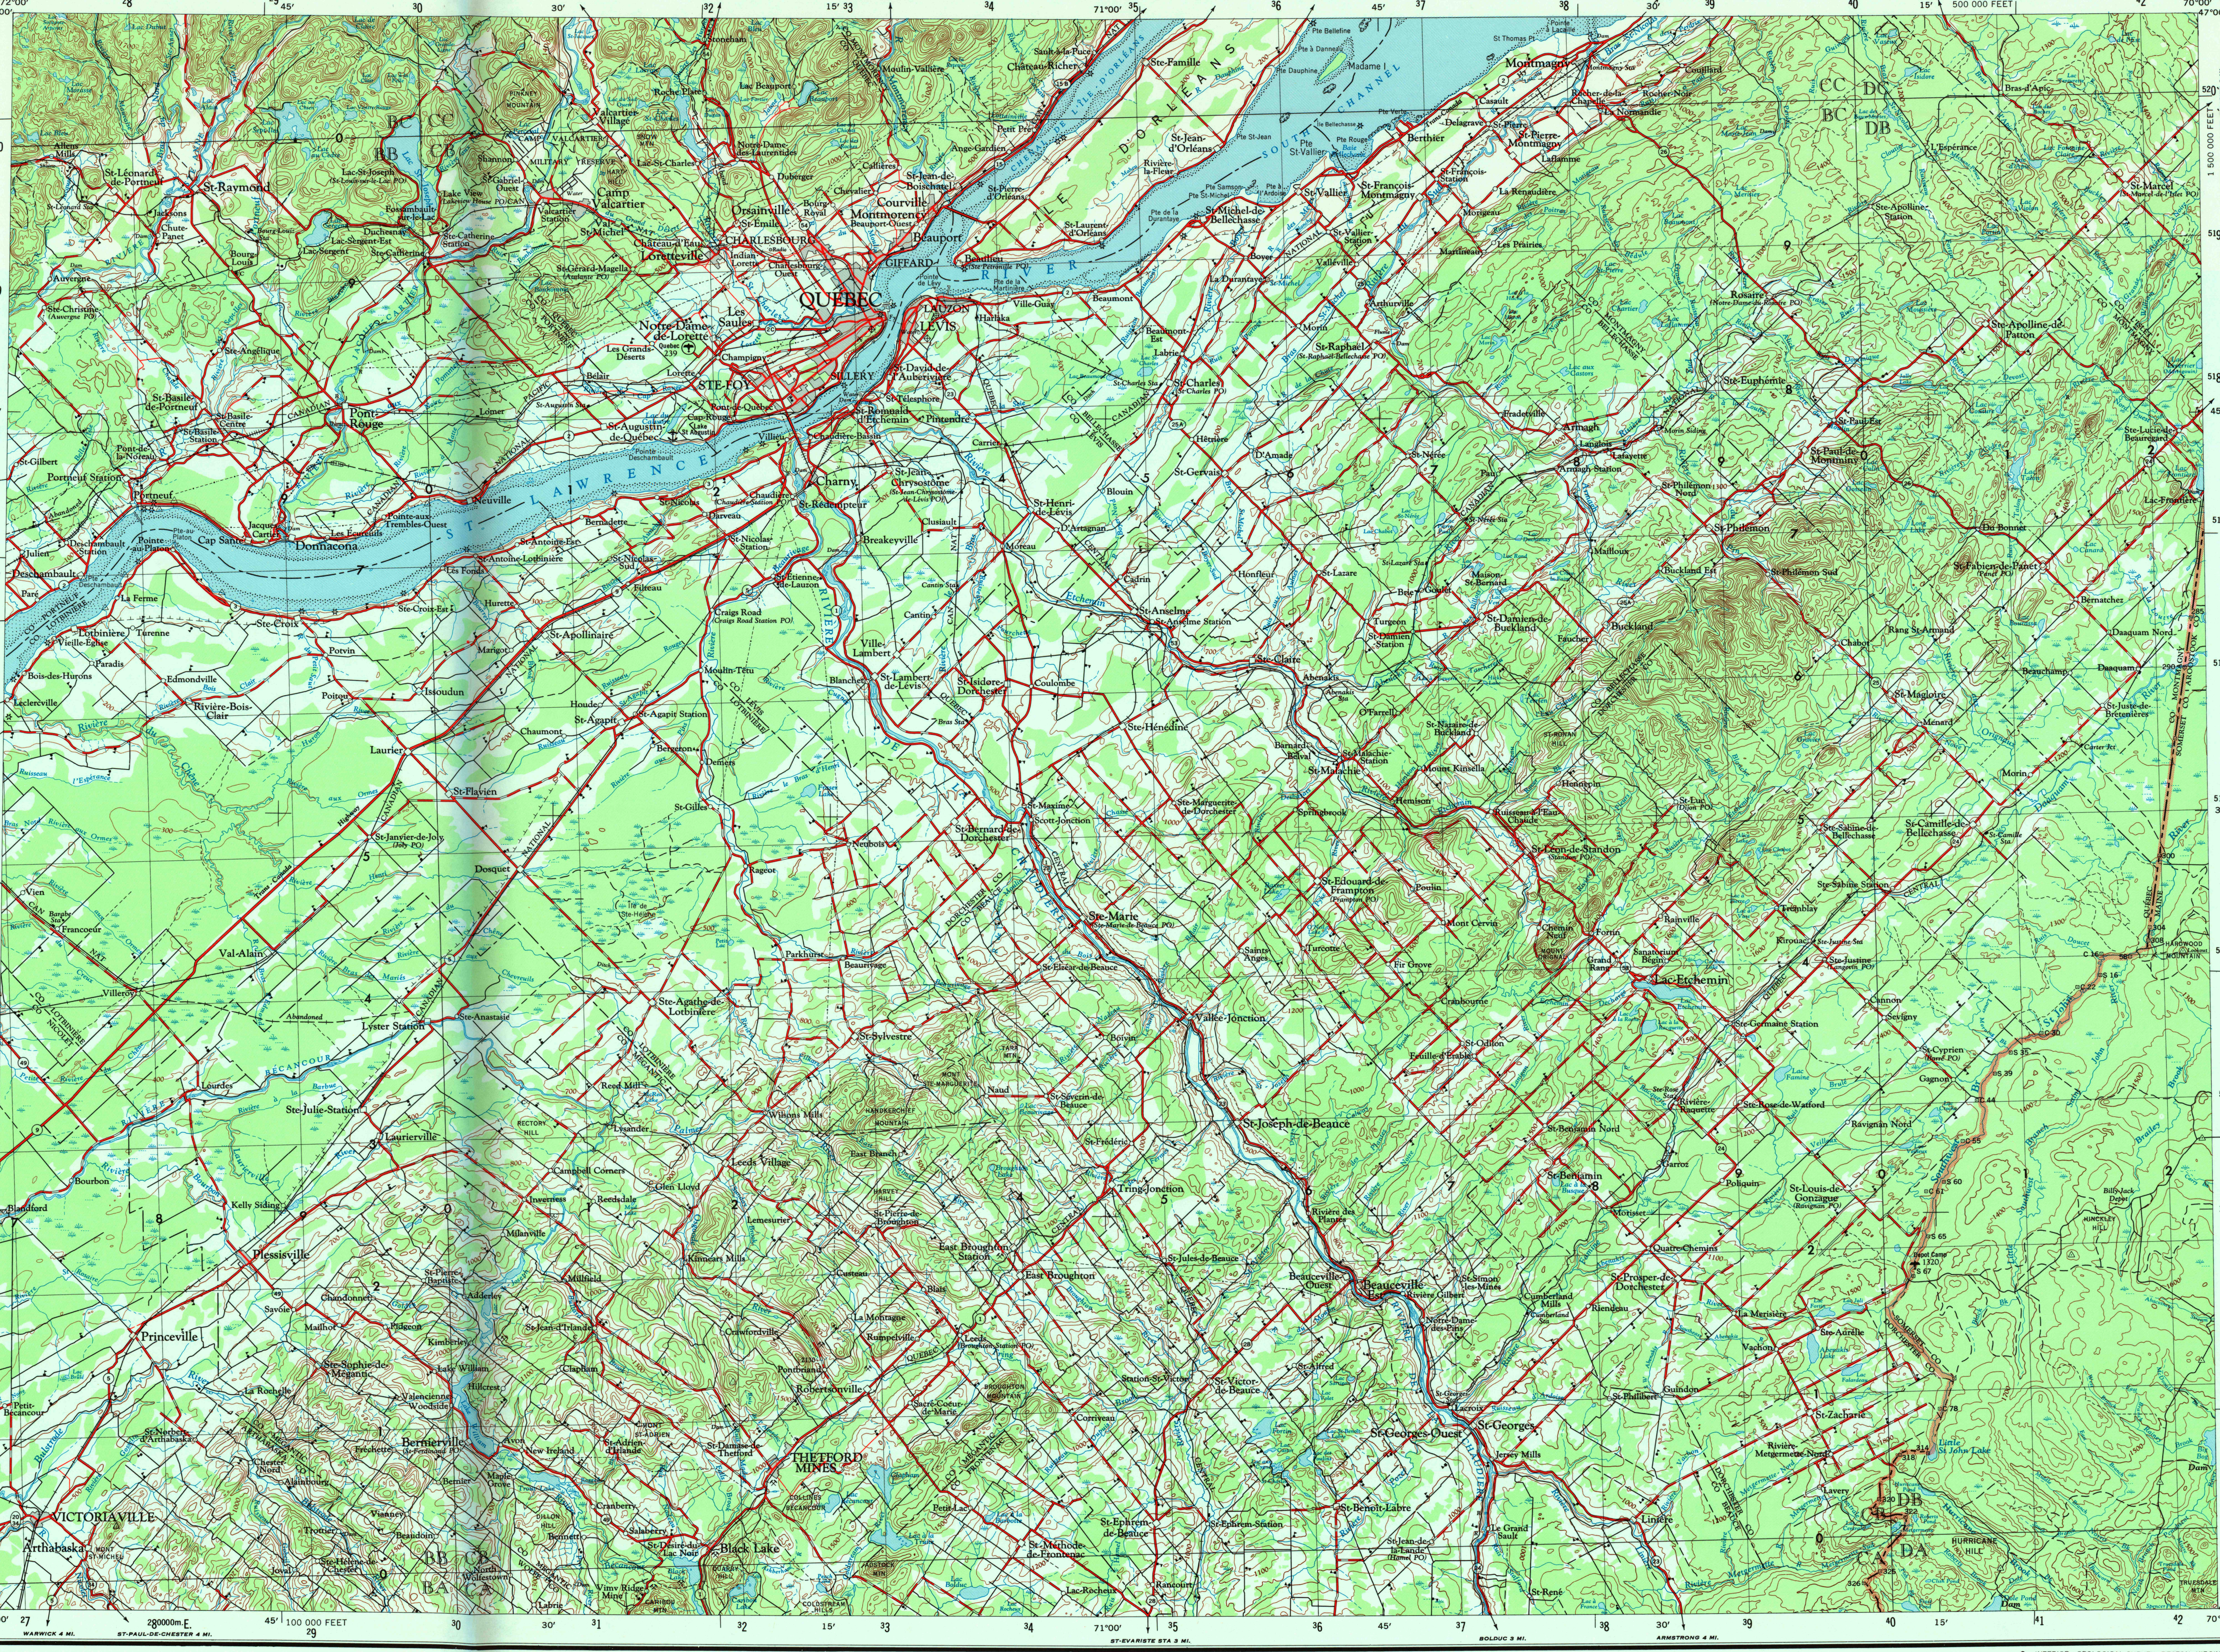

Prepared by the Army Survey Establishment, R.C.E., 1962. U.S. area from maps of the Army Map Service, Corps of Engineers, U.S. Army. Published for civil use by the Geological Survey.

100,000-foot grid based on Maine coordinate system, west zone

LEGEND

ROAD DATA 1962

POPULATED PLACES

- City
- Town
- Settlement

LANDMARKS

- Church
- School

RAILROADS Single track / Double or Multiple

- Standard gauge
- Narrow gauge

BOUNDARIES

- International
- State or Province
- County or District
- Park or reservation

Horizontal control point

Spot elevation in feet .221

Landplane airport

Landing area

Seaplane airport

Seaplane anchorage

Power line

Woods-brushwood

ROADS

- Hard surface, all weather — 3 LANES OR MORE
- Hard surface, all weather — 2 LANES | 1 LANE
- Loose surface, all weather — 2 LANES OR MORE
- Loose surface: all weather; dry weather — 1 LANE
- Cart track or trail
- Route markers: Federal; State or Provincial — 5 11

Depth curve in feet

Limit of danger; Reef

Rocks: Awash; Sunken

Foreshore flat

Intermittent or dry stream

Marsh or swamp

30 Mud

Scale 1:250,000

5 0 5 10 15 20 Statute Miles

5 0 5 10 15 20 25 30 Kilometres

5 0 5 10 15 Nautical Miles

CONTOUR INTERVAL 100 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 19

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 18°00' WESTERLY FOR THE CENTER OF THE WEST EDGE TO 20°15' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°02' EASTERLY.

FOR SALE BY U. S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM

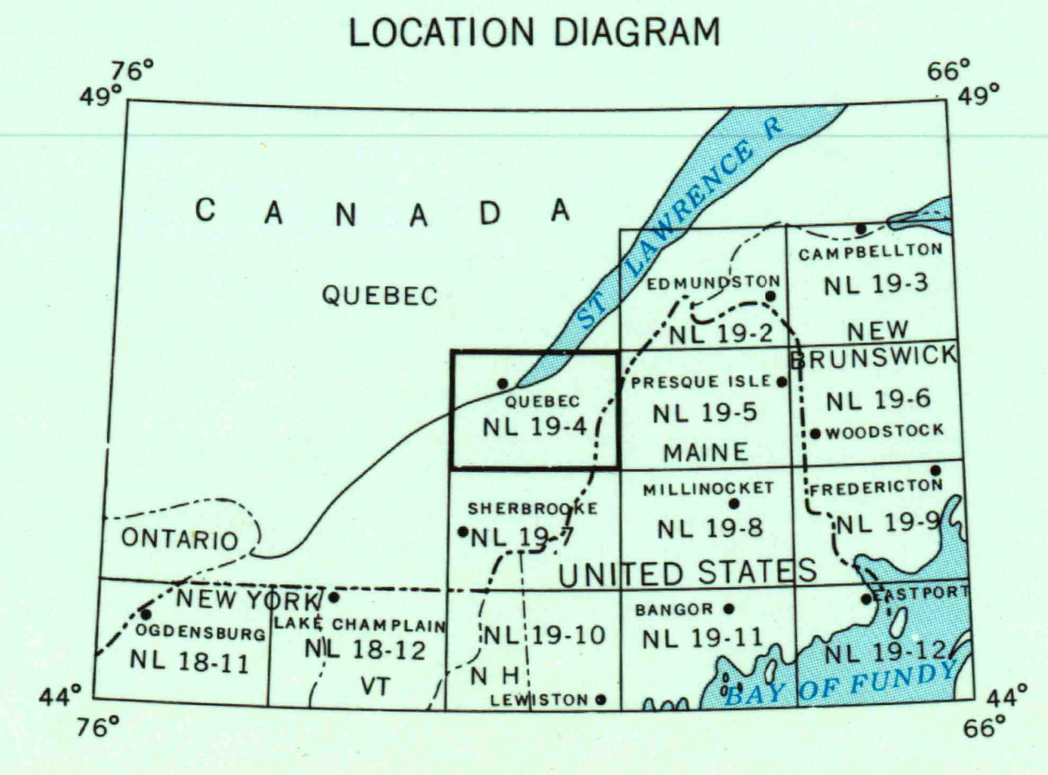

INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—1976

GRID ZONE DESIGNATION: 19T	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METRES
100,000 M. SQUARE IDENTIFICATION	SAMPLE POINT: FIR GROVE
BC CC DC / BB CB DB / BA CA DA (30, 40; 520, 510)	1. Read letters identifying 100,000 metre square in which the point lies: CB 2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: 6 Estimate tenths from grid line to point: 6 3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: 4 Estimate tenths from grid line to point: 1
IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 5100000	SAMPLE REFERENCE: CB6641
	If reporting beyond 18° in any direction, prefix Grid Zone Designation, as: 19TCB6641

QUEBEC, QUEBEC, CAN.; MAINE, U.S.

1962

JAN 2 1990

RETURN TO:
USGS NMD HISTORICAL MAP ARCHIVES